

KB75 User Manual

Revision :

- 1) Bluetooth 4.0 modular. Paired with devices with 4.0 bluetooth only. Compatible with Android(4.4 or above),MAC(10.10 or above),IOS(7.0 or above),Win(win 8 or above) systems.
- 2) When connected to computer via cable,Fn+Del= switch to Bluetooth mode. When using Bluetooth under wireless mode, switch on the battery power switch on back of the keyboard.
- 3) Mating:Press Fn+F10/F11/F12 for at least 5s to enter mating searching status. The led on F10,F11,F12 flashing fast(if flashing slow, means the device has not connected to any equipment). Then check on computer, mobile or other equipment for keyboard availability. Enter the codes as the computer shows. Led flashing ends, mating completed..
- 4) In case of keyboard bug, press ESC+left CTRL+right CTRL+Del for minimum 5s to reset. The reset will delete the setting-up of Pro layer. Save it before reset.

Firmware revision is provided occasionally. To update the firmware, pls make sure the Bluetooth power switch is turned OFF. Before update completion, DO NOT disconnect the cable to avoid keyboard being dead... In case of keyboard dead accident, we can help contacting the manufacturer for keyboard reactivation at customer charge for shipping cost. The reactivation is free of charge.

1. Keyborad Function Illustrate

- **Menu for backlight**

FN+	~`	Specific lights	Programming software definitions, first press in, second press out, Shutdown memory.
	!1	Seven color Switch	Every click RGB lights of the keyboard will loop switch between red-green-bule-purple-green-white-off; Shutdown memory.
	@2	Meteor shower	First press for single light meteor shower, second press for five lights meteor shower, third press for exit. The background are chosen by specific lights and seven color switch; the time lights stranded are chosen by FN+←-/→; Shutdown memory.
	#3	Ripple/Auro	First press for ripple, second press for aurora, third

		ra	press for exit; the background are chosen by specific lights and seven color switch; the time lights stranded are chosen by FN+←/→; Shutdown memory.
	\$4	Breath	First press for single light breath(the background are chosen by specific lights and seven color switch), second press for seven lights loop switch breath, third press for exit; the frequency are chosen by FN+←/→; Shutdown memory.
	%5	Sunset/relax	First press for sunset, second press for relax, third press to exit. The frequency are chosen by FN+←/→; 5 Shutdown memory.
	^6	Demo	First press for all kinds of lights, second press for exit. Stop demo by FN+SPACE. The frequency chosen by FN+←/→; Shutdown memory.
	↑	luminance +	Increase luminance in 5 levels
	↓	luminance -	Reduce luminance in 5 levels
	←	Frequency +	Increase the frequency of light effects in 5 levels
	→	Frequency -	Reduce the frequency of light effects in 5 levels

Special keys Function table

FN+	F8	Mouse Lock	Lock mouse function in media mode.
	ESC	Backlight Off	Lock/Open all backlight. Shutdown doesn't memory
	Win	Win Lock	Lock/Open Win-board. Shutdown doesn't memory
	F9	Win~Alt	L Win & L Alt exchange. Shutdown memory.For MAC users.
	L Shift	;', ~ :"	Exchange : &; '& ". Shutdown memory.
	F10	BD1	Long press 3s into pair status,BD1 led flash quickly;short press into reconnect status,BD1 led flash slowly;shutdown memory
	F11	BD2	Long press 3s into pair status,BD2 led flash quickly;short press into reconnect status,BD2 led flash slowly;shutdown memory
	F12	BD3	Long press 3s into pair status,BD3 led flash quickly;short press into reconnect status,BD3 led flash slowly;shutdown memory
	Delete	Bluetooth start	Start/close Bluetooth mode

Bluetooth Operation Instruction

Keyboard can be paired 3 Bluetooth devices, and keyboard can be connect to different devices to achieve rapid connection by press the key. Keyboard reset and default to connect the last use of the device. If the keyboard is in the state of cable, you can switch to the Bluetooth state by FN+Delete; then one more time to click FN+Delete to back to the cable mode.

1. Bluetooth indicator instruction:

The indicator flash quickly, into pairing status.

The indicator flash slowly, into reconnect status.

The indicator is always on, int connected status .and after 5 seconds, the indicator is put out.

2. Bluetooth pair instruction:

Before into pairing,need to close the bluetooth of device that has paired to the keyboard.

For example,After the completion of the Bluetooth 1 paired phone a, if you need to match the Bluetooth 2 and B cell phone, then need to first turn off the phone a Bluetooth, then FN+F11 long by 3S, Bluetooth indicator lights flash, open the phone B Bluetooth, Bluetooth keyboard selection, according to the prompts to enter pairing code and after pairing then open a phone's Bluetooth. At this time through the FN+F10/F11 short press, the connection of mobile phone A/B switch. Similarly, if you need to Bluetooth 3 and mobile phone 3 pairing, you need to turn off the phone A, Bluetooth B mobile phone, until the completion of the pairing and then open.

3. The following operation is error operation:

The keyboard has been connected, FN+F10/F11/F12 long press the matching operation, the keyboard does not respond to the operation;

FN+F10/F11/F12 short press the heavy even operation, if heavy even the equipment is not matched for the null device, the keyboard does not respond to the operation, the indicator light flash 2 under the return;

(3) Connected devices have not been off, forced into the pairing operation, which is the keyboard will quickly connect to the paired devices, there will be 2 Bluetooth connection is the same device. At this time, please turn off the Bluetooth device, and then re pairing one of the bluetooth.

4. Battery indicator:

The battery indicator is below in the ESC button. Always on for charging; Always off for charging completion; flash for low power.

Restore factory settings

Press “ESC + Delete + Left Ctrl + Right Ctrl” for 5seconds will restore factory settings, restore factory settings will restart keyboard.

2. Keyboard configuration

There are three modes for the keyboard, OFFICE mode MEDIA mode and

Custom mode. OFFICE mode and MEDIA mode is also Standard mode, as for Custom mode, you can make different configuration to the keyboard, the details for how to configuration and save under custom mode are in below.

How to configure backlight:


Single click the “LightSet” Key in the main screen of Programming software, the dialog box of “Backlight settings panel” will pop out.

Single press “Set All” key, choose the color in the dialog box of “color” that pops out and confirm. Then fast set up all the key color as the chosen color.


Single press “Multi key”key,the dialog box of “Set Multi Key panel” will pop out,choose the key of need to be set and it will show the chosen status.Then single pree the “Set Color”key,choose the color in the dialog box of “color“ that pops out and confirm. Then set up much key color as the chosen color.

Single press on any key on the backlight interface, choose the color in the dialog box of “color” that pops out and confirm. Then fast set up the chosen key color as the chosen color.

Click into the “Program” Key after set up the backlight, finish the set up for custom backlight.

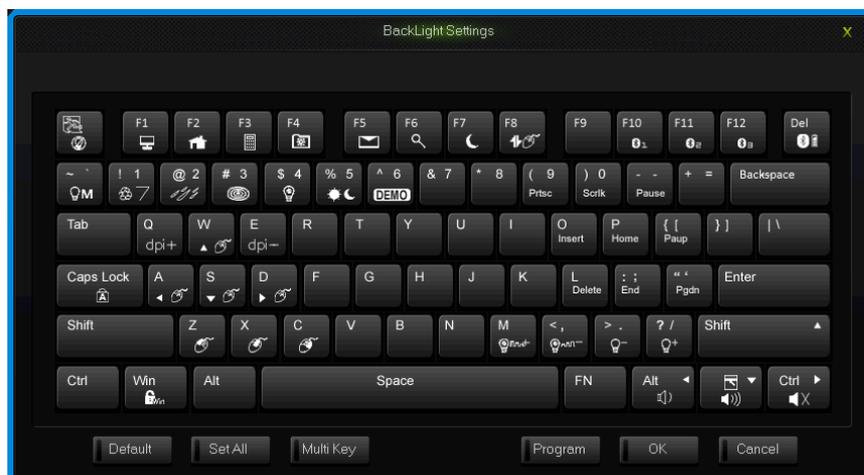Custom backlight are available under both modes. Exchange custom backlight and normal backlight with “FN+The image shows a software interface titled "BackLight Settings" with a close button (X) in the top right corner. The main area displays a virtual keyboard layout. The keyboard has several rows of keys: a top row with function keys (F1-F12) and a Del key; a second row with tilde (~), numbers 1-0 with symbols, and a Backspace key; a third row with Tab, letters Q-T, Insert, Home, Paup, and a backslash key; a fourth row with Caps Lock, letters A-L, Delete, End, Pagn, and Enter; a fifth row with Shift, letters Z-X, C-V-B-N, M, comma/less-than, greater-than/question mark/slash, and another Shift key; and a bottom row with Ctrl, Win, Alt, Space, FN, Alt, a key with a keyboard icon, and another Ctrl key. Below the keyboard, there are six buttons: "Default", "Set All", "Multi Key", "Program", "OK", and "Cancel".

Backlight settings interface

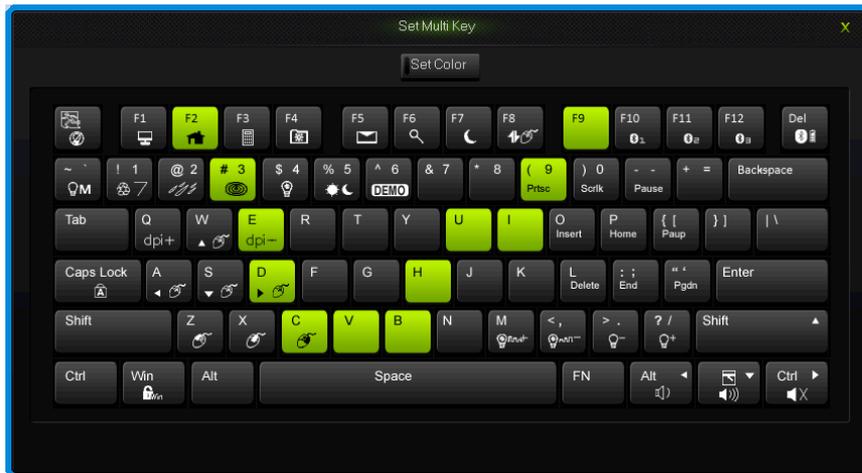

Set Multi Key interface


How to configure keyboard:

OFFICE mode to MEDIA mode or to Custom mode by switch of “BOMA”.

All keys on the keyboard are divided into up-level key and down-level key, down-level key can output only when combine with FN.

When finish the set up of all keys in programming software, to save and synchronize the configure with keys, single click the “WriteKeys” in the main screen.

Single click the “Read configuration” in the main screen, it will read the standard configuration of OFFICE/MEDIA mode when under the OFFICE/MEDIA mode and read custom configuration under custom mode.

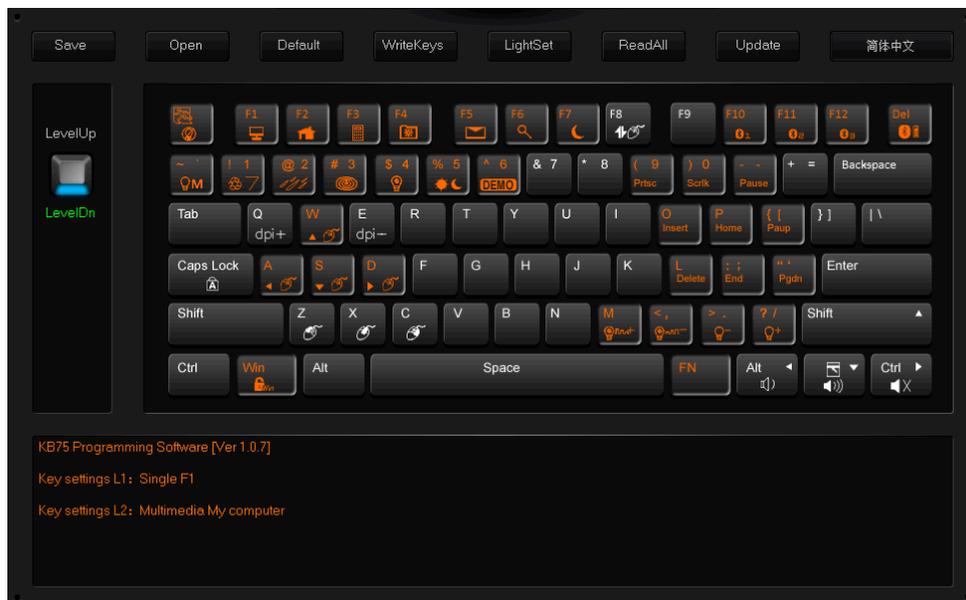


Programming Software Main Interface

2.1 single key/ combine keys

1.Single click on the key you need to configure, click “Uni/ combo” in the “KeySettings” surface.

2. Choose “Uniques” or “Combo”, single click “Record” to record the keys, combine keys can record six at most.
3. single click “OK”.

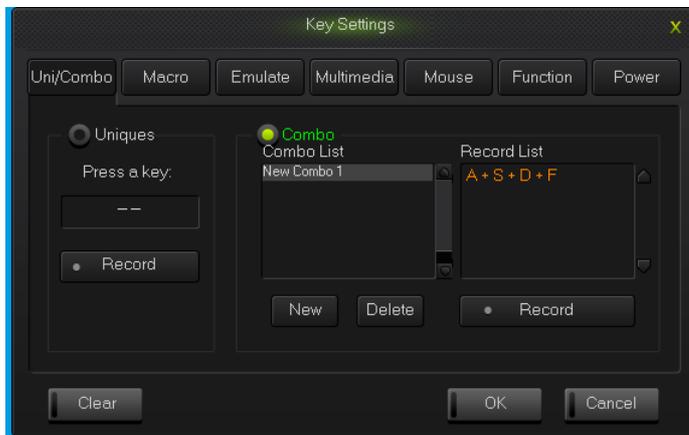

Uni/Combo keys surface

2.2 Macro definition

The keyboard can be defined in the overall definition under a custom mode shows a strong programmable feature.

What is Macro

Macro is the whole series actions that you can specify order to the keyboard. Accurately speaking, it's a series key press and key release, record every single time of the key's press, release and delay. Among which, it can automatic input when delay, that is all the time between press and release can automatic input.

How to define a macro?

1. Choose the key you need to configure, click “macro”;
2. Choose “New” on the left side of the appear window;
3. Choose a new macro, selected the style of output and automatic delay in the macro edit on the right side, then click “Record”, type the keys that need to be define on the keyboard and click “Stop Rec”;
4. Single click “OK”.

How to set up delay


Delay is the time between the press and the release of keys. keyboard has the automatic delay record and can modify delay time:

Set up automatic delay record: drive automatic records the time that typing actions need;

Modify delay time(50ms-60000ms, 1000ms=1s): after define a macro, single click the delay time two keys already have, then the delay time will become to be editable and edit the delay time .sigle click the other area of record list to exit the editable status.

How to insert mouse and delay

After recording a macro, right click the key in the edit list, choose operate insert mouse and delay.

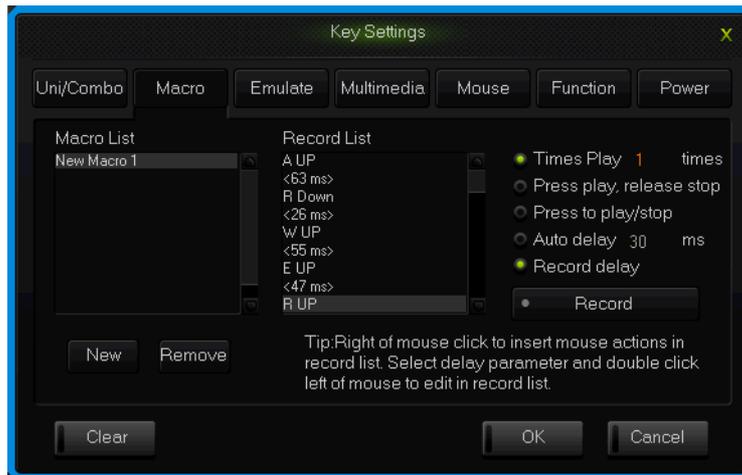

Macro definition key interface


2.3 Simulate key stroke

What is simulate key stroke?

Simulate key stroke is the function that after you click the simulate key, the keyboard will simulate the key stroke in a fast speed, it ends when the key bounce, it can also set up the speed of key stroke.

How to set up a simulate key stroke?

- 1.Single click the key you need to configure ,click "key stroke" in the "keys set up panel";
- 2.Choose "New" in the left side of the appeared window;
- 3.Choose a new-built key stroke, set up the key stroke time in the edit list on the right side, single click "Record", type in the keys that need define, then click "Stop Rec", simulate key stroke can record six at most;
- 4.Single click "OK".

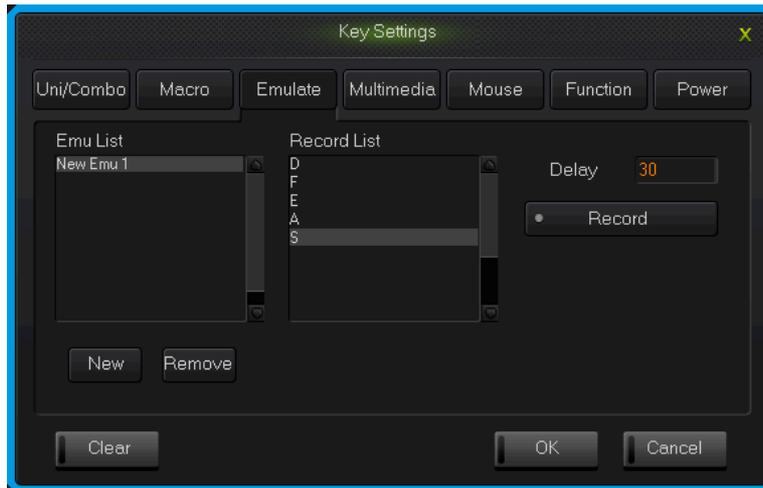


simulate key stroke interface

2.4 Multi-Media

The keyboard support usual function for multi-media, custom multi-media simplify the layout of keyboard.

- 1.Single click the key you need to configure, single click “Multimedia”;
- 2.Choose custom multi-media in the multi-media interface, then click “OK”.

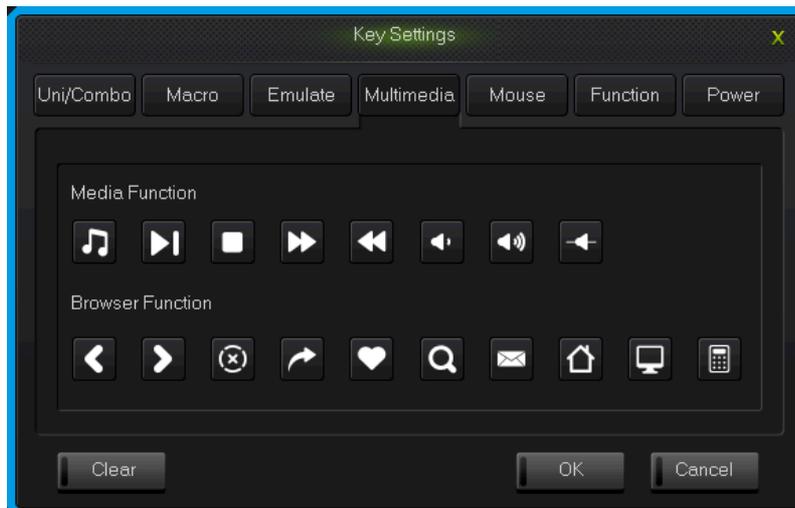

Multi-media interface

2.5 Mouse

The keyboard support Mouse.

- 1.Single click the key you need to configure, click “Mouse” in the dialog box of “Key Settings” that pops out;
- 2.Choose custom mouse functions in the mouse panel, the click “OK”.




Mouse interface

2.6 Function Key

The control key are divide into key function and backlight function.

- 1.Single click the key you need to configure, click “Funcion” in the dialog box of “key Settings” that pops out;
- 2.Choose custom functions in the control key panel, the click “OK”.

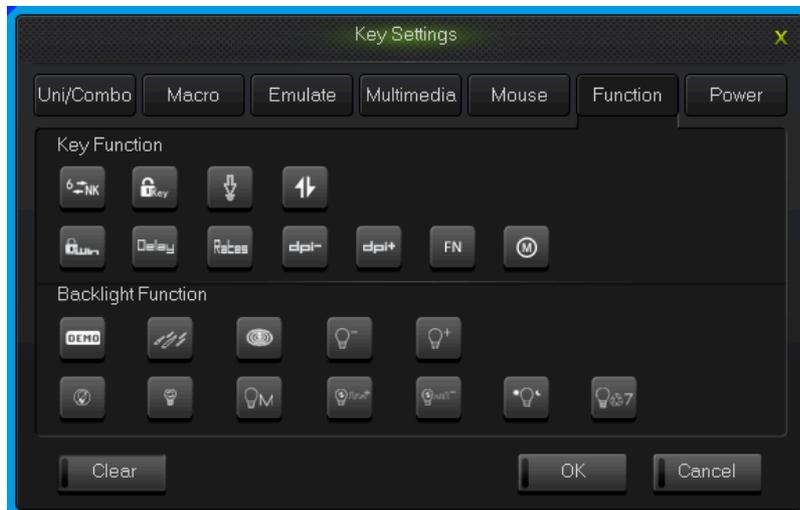


Function key interface

2.7 Power

The keyboard support power function.

- 1.Single click the key you need to configure, click “Power” in the dialog box of “KeySettings” that pops out;

2. Choose custom functions in the power panel, then click “OK”.

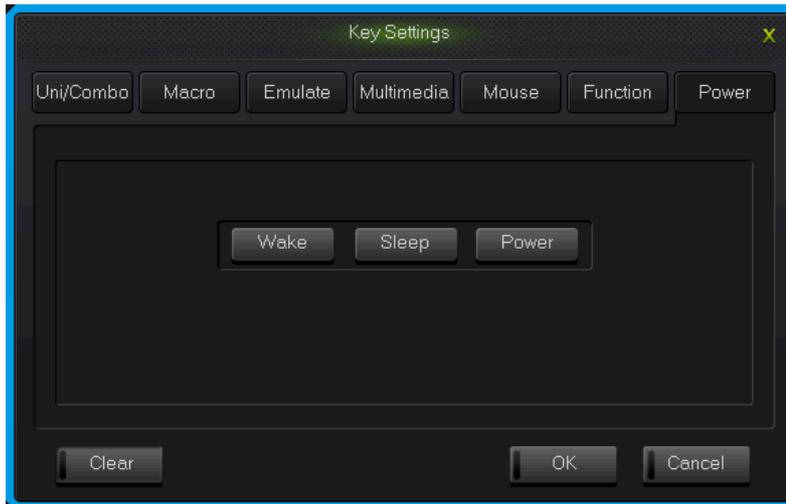

Power interface

2.8 Empty configuration

There are two circumstances for empty configuration, one is empty single key configuration, the other is empty all the configure keys.

To empty single key configuration, just single click the key and choose “Clear” in the set window.

To empty all the configuration, single click “Clear” in function bar on the main screen.

How to save and open configuration

Every configuration document corresponds to a kind of key stroke mode, so it will be more convenient for the users to configure the common programs of the keyboard. Configuration information include keys set up information and backlight set up information.

You can save those configurations that don't need in a short time on your PC and direct import next time when needed. This can avoid set up repeated.

You can still import the documents saved in PC when using another computer,

The specific ways are below:

Open the configuration

1. Single click “open” at the function bar in main screen, choose the catalog and the

corresponding configuration in the dialog box of open configuration that pops out.
2.Single click “Open”.


Save configuration

1. Single click “Save” at the function bar in main screen, choose the catalog and type in the name of configuration in the dialog box of save configuration that pops out.
- 2.Single click “Save”.

How to upgrade keyboard firmware

Upgrade keyboard firmware in order to improve the performance of the keyboard and the function that design for users experience.

- 1.Single click “Get Version” and can get firmware’s name and version.
- 2.Single click “Open”, choose .bin document and single click “Update”, then update the firmware of the keyboard with the tips.

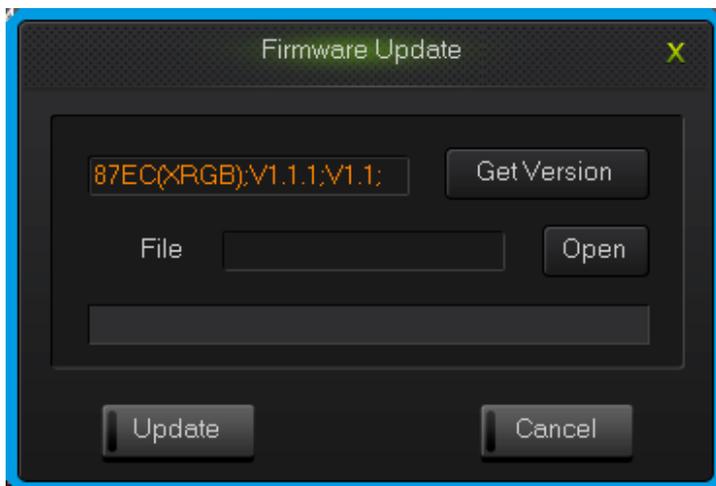

upgrade keyboard firmware interface